

Multifan



Horizontal Circulation Fan

The new generation!



VOSTERMANS
VENTILATION

YOUR SPECIALIST IN AIR

Multifan Horizontal Circulation Fan

The next generation of circulation fans

With the new Multifan Horizontal Circulation Fan, you can create a uniform indoor climate while minimizing energy consumption. The improved fan design offers a number of important advantages. For example, the energy efficiency of the fan has been greatly improved, and it is much quieter. It is also easier to attach air hoses to the fan, saving you installation costs and making the fan cheaper to use. Create the ideal growing climate for your livestock or crop, or create a fresh breeze with this compact, powerful fan.



Why choose this fan

- Powerful, quiet fan
- Among the most energy efficient in its class
- Low investment costs
- Easy to install
- Easy to maintain
- Materials resistant to extreme conditions
- Long service life: 3-year guarantee



Features

- Available in 3 versions: 5.000, 7.000 and 8.500 m³/h
- Motor insulation class F.
- IP55 motor (water-resistant and dust-resistant)
- Energy efficient, up to 22,6 W/1.000 m³/h
- Low noise, up to 46 dB(A)
- Simple to attach 52 cm diameter air hoses
- Built-in thermal protection for single-phase motors

Applications

- Greenhouse horticulture
- Agricultural: pigs, poultry, dairy cattle
- Industry

Options available

- CE wire-guard kit (affects the performances)
- 5-meter cable with plug (separately supplied)
- Built-in thermal detectors for 3-phase motors
- Frequency-controlled motor



45 cm Horizontal Circulation Fan



Simple to attach air hoses

Technical data single-phase


Article	ø (cm)	Power supply			(n) RPM	P _{in} (W)	I _{nom} (A)	I _{max} (A)	Q _v (m ³ /h)	Throw (m) *	SFP @0Pa (W/1000m ³ /h)	dB(A) **	Control options ***
		~	V	Hz									
T6E45ABM80100	45	1	230	50	950	100	0,5	0,7	4.800	45	20,8	46	E/T
T4E45DAM80100	45	1	230	50	1.460	190	0,9	1,4	6.450	55	29,8	55	E/T
T6E45BAM80100	45	1	230	50	910	230	1,1	1,4	6.750	56	34,1	47	E/T
T4E45CAM80100	45	1	230	50	1.415	370	1,7	2,5	8.700	65	42,9	54	E/T
T6E45NAM80100	45	1	230	60	1.130	110	0,5	0,8	4.850	45	22,7	49	E/T
T6E45NBM80100	45	1	115	60	1.130	110	1	1,5	4.850	45	22,7	49	E/T
T6E45OEM80100	45	1	230	60	1.150	180	0,8	1,2	6.100	49	29,5	50	E/T
T6E45OFM80100	45	1	115	60	1.155	190	1,9	2,8	6.100	49	31,1	50	E/T
T4E45OAM80100	45	1	230	60	1.740	280	1,2	2,1	7.150	60	39,2	58	E/T
T4E45OBM80100	45	1	115	60	1.735	270	2,4	4,1	7.150	60	37,8	58	E/T
T4E45PAM80100	45	1	230	60	1.655	390	1,8	2,7	8.450	65	46,2	58	E/T
T4E45PBM80100	45	1	115	60	1.660	390	3,5	5,3	8.500	65	45,9	58	E/T

Technical data three-phase

Article	ø (cm)	Power supply			(n) RPM	P _{in} (W)	I _{nom} (A) Y	I _{max} (A) Y	Q _v (m ³ /h)	Throw (m) *	SFP @0Pa (W/1000m ³ /h)	dB(A) **	Control options ***
		~	V (Y)	Hz									
T6D45ACM80100	45	3	400	50	940	110	0,5	0,6	5.000	45	21,6	47	T
T6D45BAM80100	45	3	400	50	910	220	0,4	0,5	6.700	56	32,8	48	T
T4D45CAM80100	45	3	400	50	1.425	370	0,9	1,0	8.750	65	42,6	54	T
T4D45DAM80100	45	3	400	50	1.415	450	1,1	1,2	9.250	69	48,6	55	T
T6D45NAM80100	45	3	460	60	1.135	130	0,3	0,4	5.300	45	24,5	47	T
T6D45OCM80100	45	3	460	60	1.160	170	0,5	0,5	6.150	54	27,6	51	T
T4D45OCM80100	45	3	460	60	1.755	270	0,7	0,9	7.250	60	37,2	58	T
T4D45PCM80100	45	3	460	60	1.720	410	0,9	1,1	8.850	65	46,3	59	T

- * Recommended throw based on field tests without wire guard.
- ** Sound pressure level calculated at 7 meter free blowing distance.
- *** Controllable by Transformer (T), Frequency Controllable (F), Controllable by Triac (E)

Dimensions (mm)

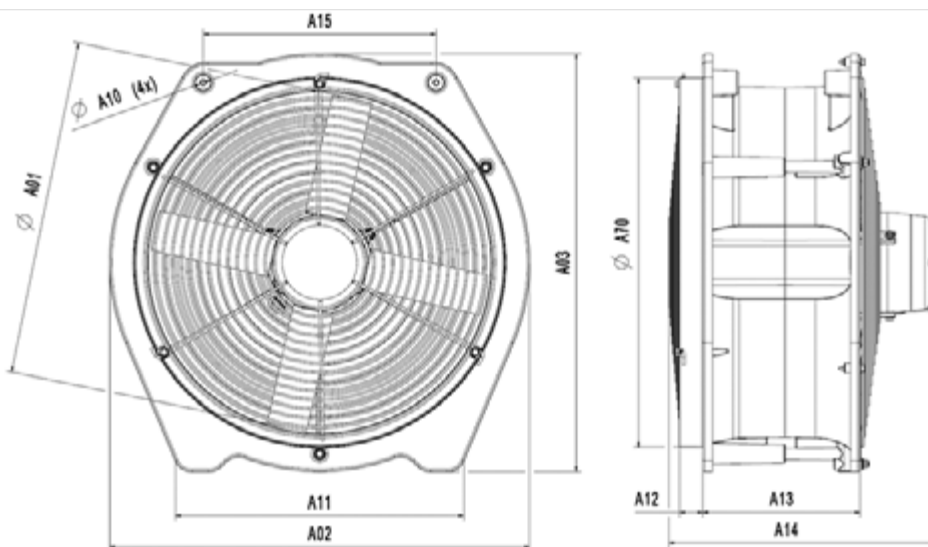


ø (cm)	A01	A02	A03	A10	A11	A12	A13	A14	A15	A70
45	472	586	586	6,5	403	32	220	368	326	520

Multifan Circulation Fans

Our range of circulation fans offers a solution for every indoor climate challenge. We offer fans that are specifically designed to evenly distribute air in an energy-efficient way. Vertical or horizontal airflows improve temperature and humidity differences, creating a uniform

climate. In addition, we offer circulation fans that ensure that animals or people are kept cool. A solution that can help prevent heat stress and keep animals healthy.

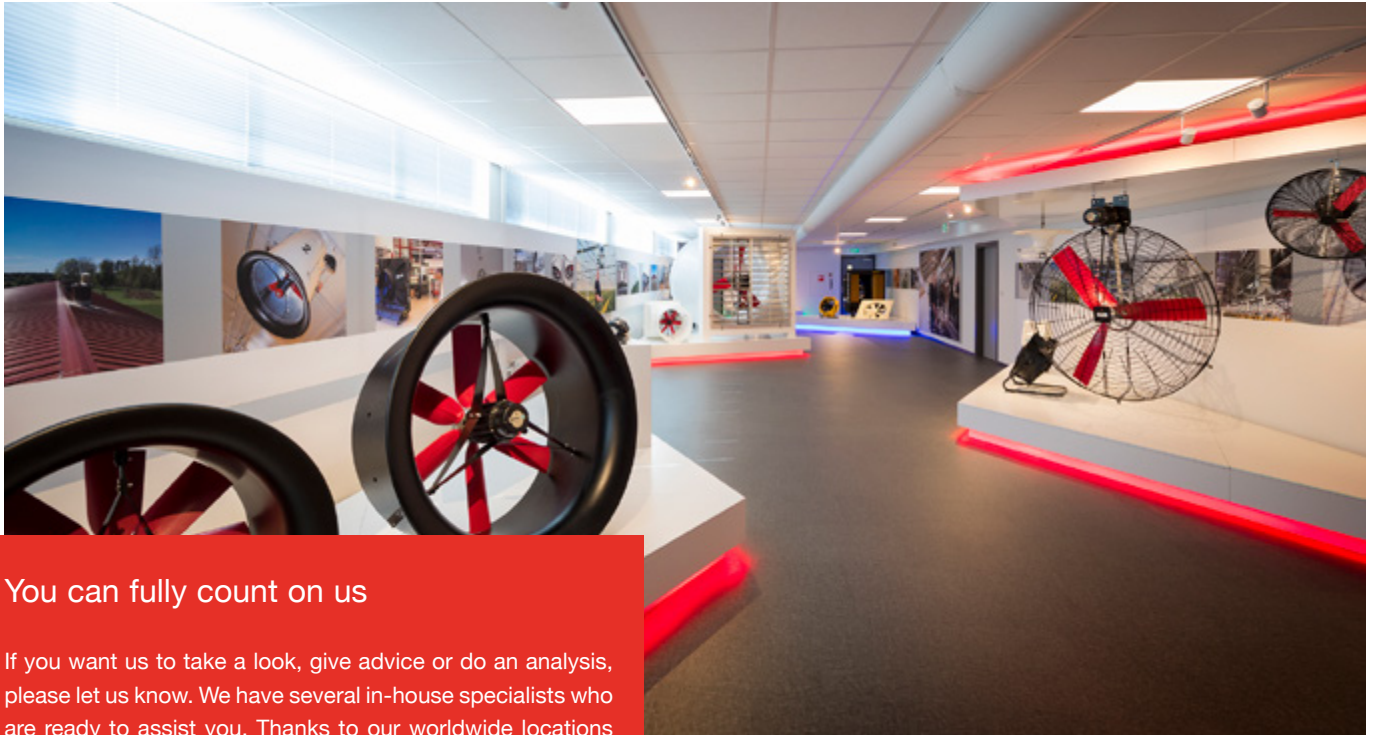

You can fully count on us

If you want us to take a look, give advice or do an analysis, please let us know. We have several in-house specialists who are ready to assist you. Thanks to our worldwide locations and our dealer network, we can assist you anywhere in the world. Are you looking for a dealer in your area? Let us know and we will send the location of our nearest dealer right to your mailbox!

Why choose Vostermans Ventilation:

LOYAL TO YOU

We care for your specific needs based on our long expertise. In close cooperation with you we secure your business outcomes.

RELIABLE

Since our foundation in the Netherlands in 1952, we maintain our reputation as reliable partner. Our carefully selected global network of independent distributors strive to deliver you dedicated service and expertise.

FUTURE PROOF

Our future proof approach, which combines energy efficiency solutions with robust quality and rigorous testing, is based on a genuine commitment to serve as a trusted partner.

Vostermans Ventilation is a global developer and manufacturer of sustainable axial fans for the agricultural and industrial market. Sustainability is key for Vostermans. Their premium brandlines Multifan and EMI are showcasing the drive for advanced energy efficient fans. The company applies continuous innovation and research in their own motor production facility and in house state of the art R&D department. Vostermans Ventilation, part of Vostermans Companies founded in 1952, is based in Venlo, the Netherlands and operates in USA, China and Malaysia.



YOUR SPECIALIST IN AIR

All rights reserved. Vostermans Companies is not responsible for inaccurate or incomplete data. In case of any questions and / or remarks please contact ventilation@vostermans.com. Subject to alterations 08/2025

Venlo - The Netherlands
Tel. +31 (0)77 389 32 32
ventilation@vostermans.com

Bloomington, IL- USA
Tel. +1 309 827-9798
ventilation@vostermansusa.com

Tmn Klang Jaya - Malaysia
Tel. +60 (0)3 3324 3638
ventilation@vostermansasia.com

Shanghai - China
Tel. +86 21 5290 2889
ventilation@vostermanschina.com