

Régulateur électronique à paliers (cascade)

Le régulateur Relink-2c permet une régulation de la température par activation et désactivation séquentielles (cascade) des ventilateurs, à partir d'une entrée 0-10V. Le courant maximum pour l'ensemble s'élève à 10 ampères (pour les 5 relais). Des contacts supplémentaires sont nécessaires pour résister à des courants supérieurs à 10 ampères ou pour piloter des ventilateurs triphasés.




Avantages:

- Faible investissement
- Facile à monter
- Facile à piloter
- Compatible avec les systèmes de ventilation nouveaux et existants.

Caractéristiques:


- Régulation pour l'activation et la désactivation séquentielles, sur 5 paliers, des ventilateurs
- Sortie 12V DC pour régulation du potentiomètre (pilotage direct du régulateur)
- 5 secondes de délai entre les différents paliers afin d'éviter les courts-circuits
- Protection coupe-circuit intégrée
- Raccordement d'urgence sur le palier 2 en cas de panne de courant

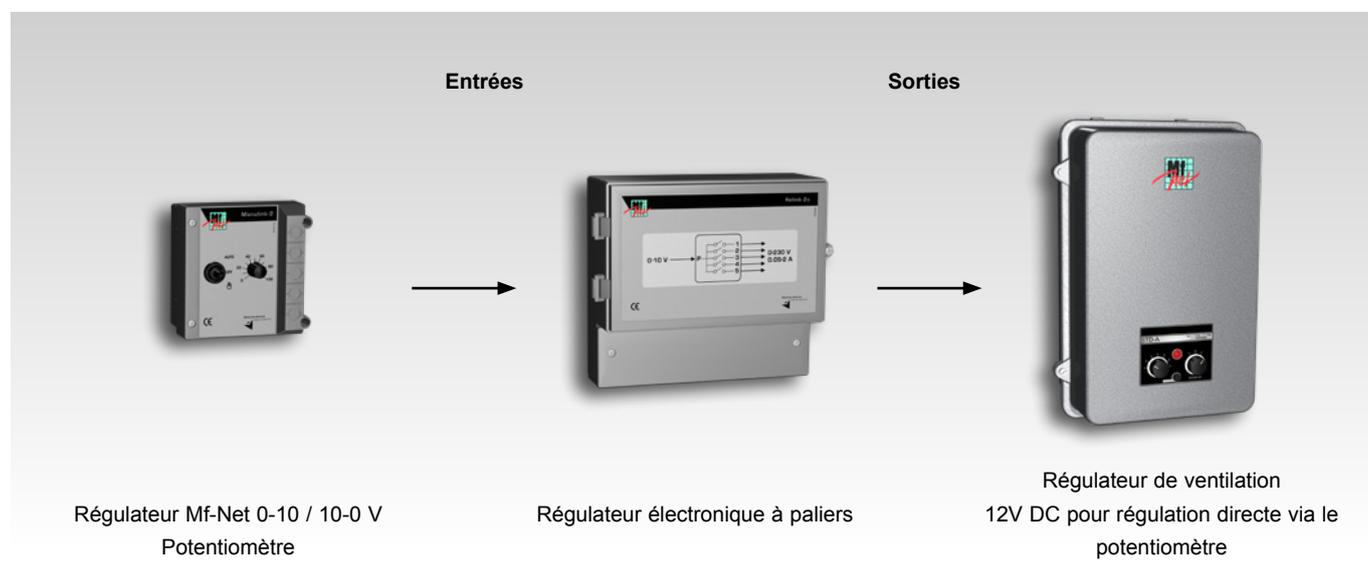

Spécifications Relink-2C

Définition	Min.	Type	Max.	Remarques
Type de régulateur				Régulation électronique par paliers (cascade)
Réseau	207 V	230 V	253 V	1~
Fréquence	50 Hz		60 Hz	
Régime entrée	0 V 10 V		10 V 0 V	Via le commutateur DIP
Impédance entrée		25 kΩ		
Précision entrée		±1 %		
Paliers d'entrée ventilateur	1		5	
Courant	0.5 A		10 A	Tous relais confondus
Valeur du potentiomètre optionnel	1 kΩ	10 kΩ	50 kΩ	Pour réglage manuel
Boîtier				Plastique IP54
Poids (non emballé)		2 kg		
Dimensions (l x h x p)		267 x 225 x 104 mm		
Température de fonctionnement	0		40 °C	
Température de stockage	-15 °C		50 °C	
Humidité			95 %	

Schéma de régulation 0-10 V

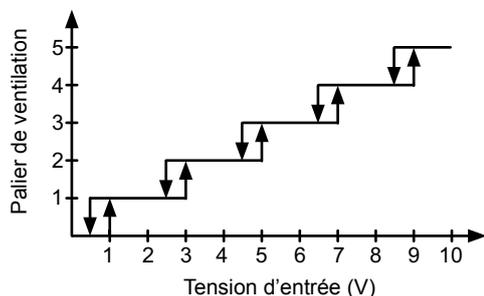

Why choose Vostermans Ventilation:

LOYAL TO YOU

We care for your specific needs based on our long expertise. In close cooperation with you we secure your business outcomes.

RELIABLE

Since our foundation in the Netherlands in 1952, we maintain our reputation as reliable partner. Our carefully selected global network of independent distributors strive to deliver you dedicated service and expertise.

FUTURE PROOF

Our future proof approach, which combines energy efficiency solutions with robust quality and rigorous testing, is based on a genuine commitment to serve as a trusted partner.

Vostermans Ventilation is a global developer and manufacturer of sustainable axial fans for the agricultural and industrial market. Sustainability is key for Vostermans. Their premium brandlines Multifan and EMI are showcasing the drive for advanced energy efficient fans. The company applies continuous innovation and research in their own motor production facility and in house state of the art R&D department. Vostermans Ventilation, part of Vostermans Companies founded in 1952, is based in Venlo, the Netherlands and operates in USA, China and Malaysia.



YOUR SPECIALIST IN AIR

All rights reserved. Vostermans Companies is not responsible for inaccurate or incomplete data. In case of any questions and / or remarks please contact ventilation@vostermans.com. Subject to alterations 01/2020

Venlo - The Netherlands
Tel. +31 (0)77 389 32 32
ventilation@vostermans.com

Bloomington, IL- USA
Tel. +1 309 827-9798
ventilation@vostermansusa.com

Tmn Klang Jaya - Malaysia
Tel. +60 (0)3 3324 3638
ventilation@vostermansasia.com

Shanghai - China
Tel. +86 21 5290 2889/2899
ventilation@vostermanschina.com