


Spécifications Trilink-2TN

Définition	Min.	Type	Max.	Remarques
Type de régulateur				Régulation
Réseau	195 V	230 V	253 V	1~
Fréquence	50 Hz		60 Hz	
Fusible F1 (Sortie ventilateur)		10 A		Dimensions 5 x 20 mm
Régime entrée	0 V 10 V		10 V 0 V	Via le commutateur DIP
Impédance entrée		20 kΩ		
Tension d'entrée ventilateur	0 V		Vin-5 V	
Courant d'entrée ventilateur	0.5 A		10 A	
Puissance sortie			2300 VA	
Boîtier				Plastique IP54
Poids (non emballé)		1,5 kg		
Dimensions (l x h x p)		267 x 225 x 104 mm		
Température de fonctionnement	- 10 °C		40 °C	
Température de stockage	-15 °C		50 °C	
Humidité			95 %	

Schéma de régulation 0-10 V

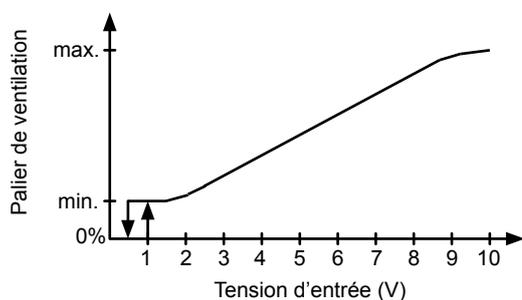

Why choose Vostermans Ventilation:

LOYAL TO YOU

We care for your specific needs based on our long expertise. In close cooperation with you we secure your business outcomes.

RELIABLE

Since our foundation in the Netherlands in 1952, we maintain our reputation as reliable partner. Our carefully selected global network of independent distributors strive to deliver you dedicated service and expertise.

FUTURE PROOF

Our future proof approach, which combines energy efficiency solutions with robust quality and rigorous testing, is based on a genuine commitment to serve as a trusted partner.

Vostermans Ventilation is a global developer and manufacturer of sustainable axial fans for the agricultural and industrial market. Sustainability is key for Vostermans. Their premium brandlines Multifan and EMI are showcasing the drive for advanced energy efficient fans. The company applies continuous innovation and research in their own motor production facility and in house state of the art R&D department. Vostermans Ventilation, part of Vostermans Companies founded in 1952, is based in Venlo, the Netherlands and operates in USA, China and Malaysia.



YOUR SPECIALIST IN AIR

All rights reserved. Vostermans Companies is not responsible for inaccurate or incomplete data. In case of any questions and / or remarks please contact ventilation@vostermans.com. Subject to alterations 01/2020

Venlo - The Netherlands
Tel. +31 (0)77 389 32 32
ventilation@vostermans.com

Bloomington, IL- USA
Tel. +1 309 827-9798
ventilation@vostermansusa.com

Tmn Klang Jaya - Malaysia
Tel. +60 (0)3 3324 3638
ventilation@vostermansasia.com

Shanghai - China
Tel. +86 21 5290 2889/2899
ventilation@vostermanschina.com